

備考欄 (受注ノ経過ソノ他) REMARKS (PROCESS OF RECEIVING ORDER)

BOOM 3.00m
ARM 2.05m
BOOM CYLINDER ZX135USK-6 SPECIAL BOOM CYLINDER
ARM CYLINDER ZX135USK-6 SPECIAL ARM CYLINDER
BUCKET CYLINDER ZX135USK-6 SPECIAL BUCKET CYLINDER

YEAR		QUOTATION NO.	
年度(西暦)	見積NO.		

MODEL 使用機種	SYM 記号	REVISIONS 来歴	DATE 年月日	REVD 訂正	CHKD 審査
ZX135US-6	△				
SHORT REACH					

DWN	DRAW DATE	入庫 REGD	名称 TITLE	図番 DWG.#	来歴 REV	頁 P
CHKD	尺度 SCALE		ミツモリズ			
CHKD			Hitachi Construction Machinery Group			
APPD						



XC000006688

1/1

ZAXIS 135US-6 SHORT REACH SPECIFICATION

Base machine model	ZX135US-6
Bucket capacity (ISO heaped)	0.65 m ³
Operating weight	15 400 kg
Ground pressure	52.4 kpa
Working ranges	
Max. digging reach	6 390 mm
※Max. digging depth	2 770 mm
※Max. cutting height	7 450 mm
※Max. dumping height	5 270 mm
Min. swing radius	2 570 mm
※Ditto height	4 960 mm
※Max. vertical wall digging depth	1 950 mm
Ditto reach	5 190 mm
Overall height	2 870 mm
Overall length	5 290 mm
Overall width	2 490 mm

Dimensions with mark ※ exclude track shoe lug height.

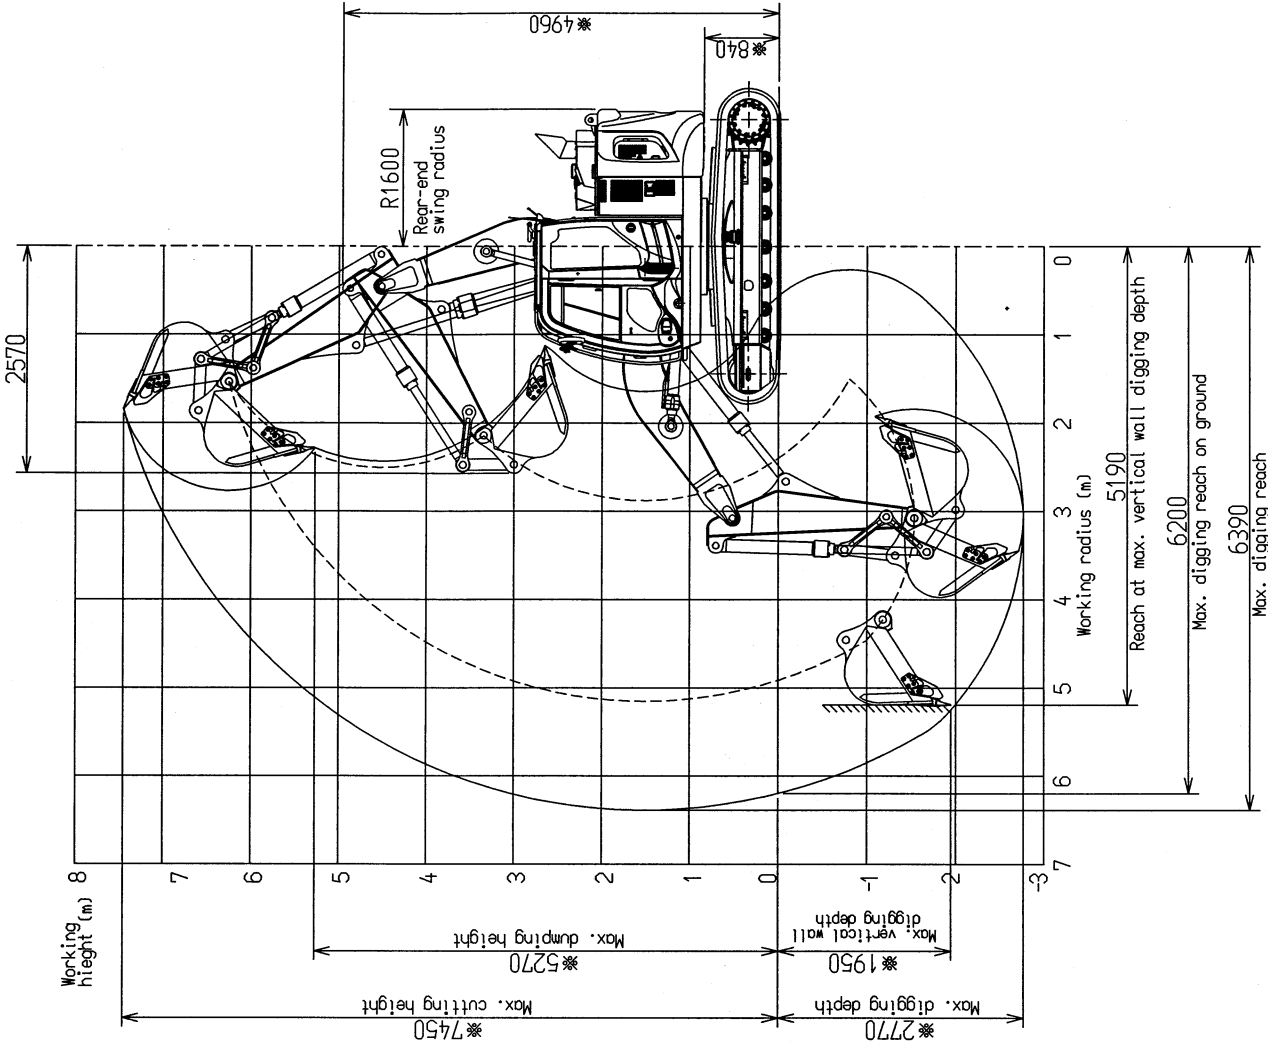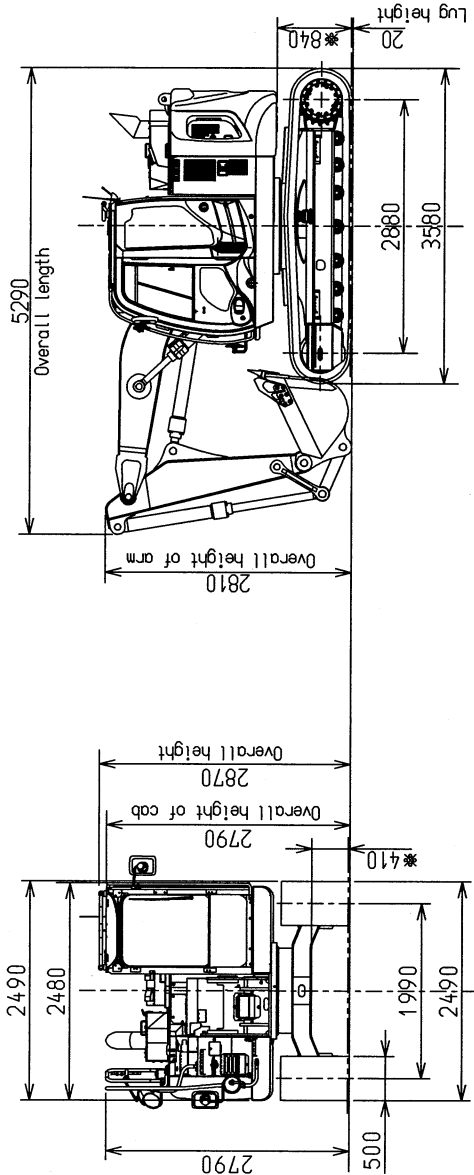

Hitachi Construction Machinery Group

名称 TITLE ZX135US-6 SHORT REACH

図番 DWG.# XC000006688

NOTES

- 1.Use of this machine is limited to light works such as digging soft soil,gathering debris,loading, etc.
- 2.Lateral hit by swing motion to heaped scraps,etc. is not permitted.
- 3.Hammering to hard objects and pulling out rigid structures are not permitted.
- 4.Never use this machine for crane.
- 5.Use of unqualified bucket may cause interference between arm and bucket.
- 6.These specifications are subject to change without notice.

図番 DWG.# XC000006688