


KUBOTA WHEEL LOADER RT100-2

For Earth, For Life
Kubota

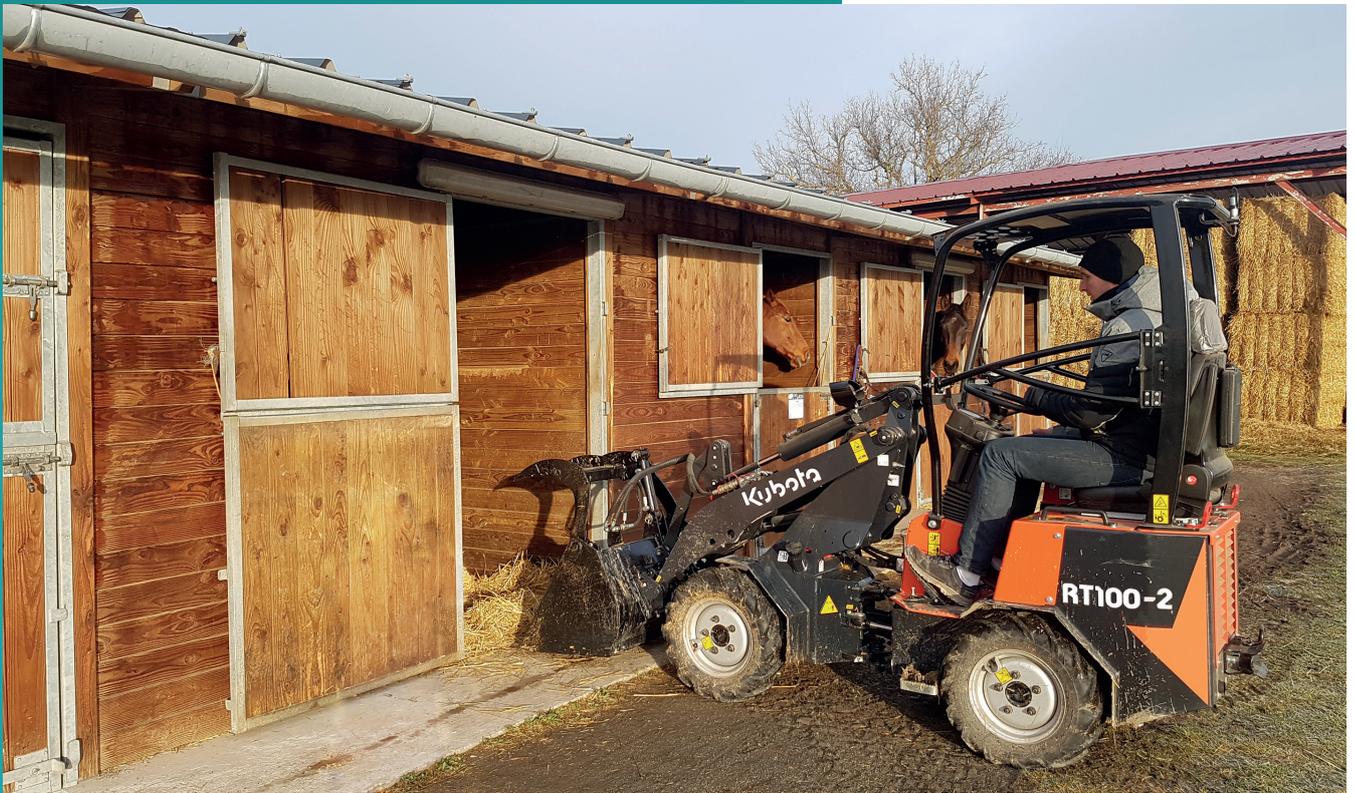

Engine output:
20 HP / 15 kW

ISO 9249



Machine weight:
1100 kg

Standard equipment

Kubota Engine D722 Stage V

Tyres 23x8.5-12 AS (Total width 92 cm)

Hydrostatic Transmission 4 wheel drive with automotive control

Driving system with 4 hydraulic wheel motors Poclain

100% differential lock on request

Electric shuttle on joystick

Front attachment controlled by joystick

Double acting mechanical auxiliary circuit AUX1

Floating position

ROPS / FOPS canopy included safety doors

Deluxe seat with safety belt, armrest and extended backrest

Battery main switch

Lifting eyes

Working light (halogen) front and on lifting arm

Double-element air cleaner

Oil Cooler

Mechanical quick coupler

Hydraulic multidisk brake - Electric controlled




Specifications

Model name		RT100-2	
Engine	Make	Kubota	
	Model	D722	
	Displacement	CC	719
	Output	HP(kW)	20 (15)
Service weight		kg	1100
Tipping load		kg	1000
Driving speed		km/h	0~15
Lifting capacity	A	kg	1690
	B	kg	800
	C	kg	550
Auxiliary circuit	Oil flow	l/min	28
	Oil pressure	bar	150



Dimensions

Model name		RT100-2	
A	Wheel base	mm	1205
B	Overall length	mm	2211
C	Overall height with canopy	mm	2060
D	Overall width	mm	920/1220
E	Height front frame	mm	1380
F	Max. dumping height	mm	1408
G	Max. bucket pin height	mm	2170
H	Height with bucket	mm	2967

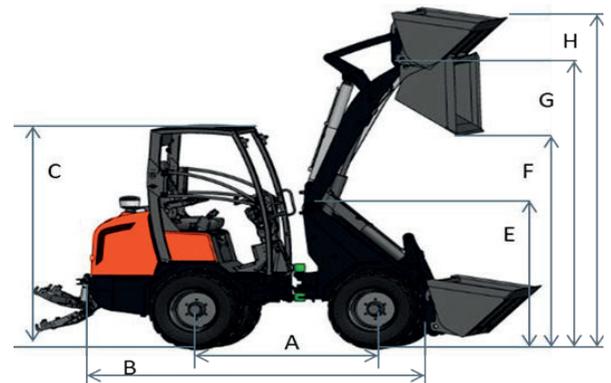


Accessories



Earth bucket



Bucket 4 in 1

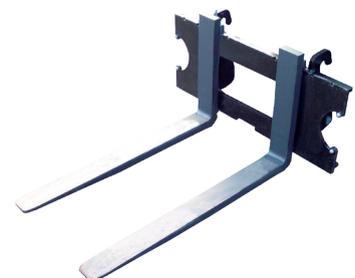

Pallet fork



KUBOTA EUROPE S.A.S.

19 rue Jules Verceyusse
 Zone Industrielle - CS 50088
 95101 Argenteuil Cedex France
 Téléphone : (33) 01 34 26 34 34
 Télécopieur : (33) 01 34 26 34 99
 www.kubota-eu.com